

600-1600 series BRASS FITTINGS, HOSE, IN-LINE F-R-Ls, HOSE CLAMPS, AIR CHUCKS



1667
1669
1670
1674
1674-4
1675
1675-4

NYLON RE-KOIL AIR HOSE


Assembled with re-usable, full flow male NPT swivel fittings on both ends to avoid twisting and kinking. Individual display bag packaged. Resists abrasions.

- Maximum working pressure: 200 PSI @ 70° F
- Working temperature: -40° F to 180° F (-38° C to 82° C)
- Material: Equivalent to nylon 12
- Color: Yellow

Part No.	Hose ID	Length	Swivel male NPT
1667	1/4"	12'	1/4"
1669	1/4"	25'	1/4"
1669-100	1/4"	100'	
1670	1/4"	50'	1/4"
1674	3/8"	25'	3/8"
1674-4	3/8"	25'	1/4"
1674-100	3/8"	100'	
1675	3/8"	50'	3/8"
1675-4	3/8"	50'	1/4"

Replacement fittings for nylon re-coil hose:

- 1669-1** 1/4" MALE NPT SWIVEL HOSE END, 1/4" NPT
- 1669-2** 1/4" ID MENDER, REPAIR UNION
- 1675-1** 3/8" ID MALE SWIVEL HOSE END, 3/8" NPT
- 1675-5** 3/8" ID MALE SWIVEL HOSE END, 1/4" NPT

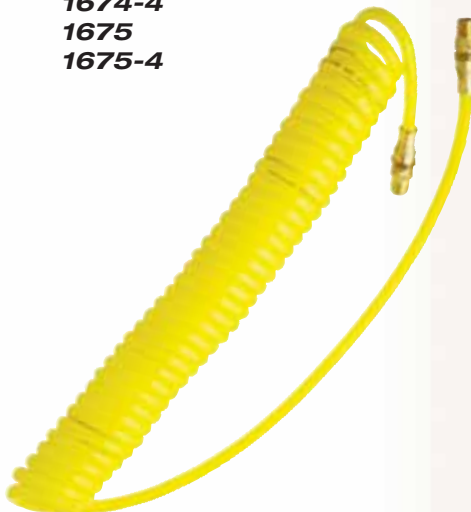

1671-10
1671-20
1671-30
1672-20
1672-30
1673-20
1673-30

POLYURETHANE RE-KOIL AIR HOSE

Most flexible of all re-coil hoses has excellent shape retention. Resists abrasions, corrosive materials, oil & grease. Light & flexible completely assembled with 18" straight hose whip with swivel fittings on both ends. Individual display bag package.

- Maximum working pressure: 125 PSI @ 70° F
- Working temperature: -50° F to 180° F (-46° C to 82° C)
- Material: Polyurethane
- Color: Yellow

Part No.	Hose ID	Length	Swivel male NPT
1671-10	1/4"	10'	1/4"
1671-20	1/4"	20'	1/4"
1671-30	1/4"	30'	1/4"
1672-20	3/8"	20'	1/4"
1672-30	3/8"	30'	1/4"
1673-20	3/8"	20'	3/8"
1673-30	3/8"	30'	3/8"

Replacement fittings for polyurethane re-coil hose:

- 1671-1** 1/4" MALE NPT SWIVEL HOSE END, 1/4" ID HOSE REPAIR KIT
- 1672-1** 1/4" MALE NPT SWIVEL HOSE END, 3/8" ID HOSE REPAIR KIT
- 1673-1** 3/8" MALE NPT SWIVEL HOSE END, 3/8" ID HOSE REPAIR KIT



SWIVEL END SNUBBER HOSES

Absorb shock to air couplers from impact tools and/or air hammers. Snubber hoses are fitted with a full 360° steel swivel fitting for greater flexibility and easier use.

- Burst pressure: 800 lbs.
- Maximum working pressure: 200 PSI

Part No.	Hose ID	Length	360° Swivel fitting NPT	Brass fitting
S 680	1/4"	30"	Male 1/4"	Female 1/4"
S 680-1	1/4"	5'	Male 1/4"	Female 1/4"
S 680-2	3/8"	30"	Male 1/4"	Female 1/4"
S 680-3	3/8"	5'	Male 1/4"	Female 1/4"
681	1/2"	2'	Male 3/8" non-swivel	Male 3/8"
681-1	1/2"	2'	Male 1/2" non-swivel	Male 1/2"



S 680
S 680-1
S 680-2
S 680-3
681
681-1

HEAVY DUTY-LIGHT WEIGHT-SNUBBER HOSES

Made from light-weight neoprene which is more flexible than standard hose even in extreme temperatures. Absorb shock to air couplers from impact tools and/or air hammers. Snubber hoses are fitted with a full 360° steel swivel fitting for greater flexibility and easier use.

- Burst strength: 1000 lbs.
- Maximum working pressure: 250 PSI

Part No.	Hose ID	Length	360° Swivel fitting NPT	Brass fitting
S 1679	1/4"	30"	Male 1/4"	Female 1/4"
S 1679-2	3/8"	30"	Male 1/4"	Female 1/4"



S 1679
S 1679-2

RE-KOIL HOSE SAFETY BLO-GUN KIT

S 225 RE-KOIL HOSE-SAFETY BLO-GUN KIT

Kit includes :

- | | |
|-----------------|-------------------------------|
| 1 each of #1669 | 1/4" x 25' nylon re-coil hose |
| 1 each of #148 | Blo-gun |
| 1 each of #727 | 1/4" M-style male plug |
| 1 each of #715 | 1/4" M-style female coupler |



S 225